

## Shenzhen Fluence Technology PLC.

🏠 Add: 07F,4#Building B,TianAn Cyber Innovation  
Park ,Longgang,Shenzhen,P.R.China

☎ Tel: +86-755-84516813

[www.pccooler.com](http://www.pccooler.com) | 🔍




**E126M  
SERIES**

**INSTALLATION**


## COMPONENTS

x1



Heatsink

x1



LGA775/115X  
Bracket

x4



Black Pin  
(B.P.)

x1



Thermal Grease

1. LGA775: push inside
2. LGA115X: push outside



**Notice: default as 115X**




LGA775



LGA115X

**Apply a thin layer of thermal grease onto the surface of CPU.**

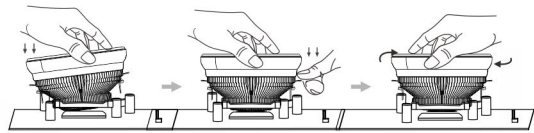


1. Hook one side.

2. Press on level and hook up other side.

3. Turn the cooler to make sure it install firm.

## For AMD up to AM4

**Apply a thin layer of thermal grease onto the surface of CPU.**

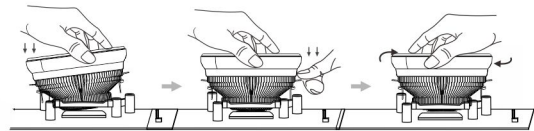

1. Hook one side.

2. Press on level and hook up other side.

3. Turn the cooler to make sure it install firm.

## For Intel LGA775/115X

